



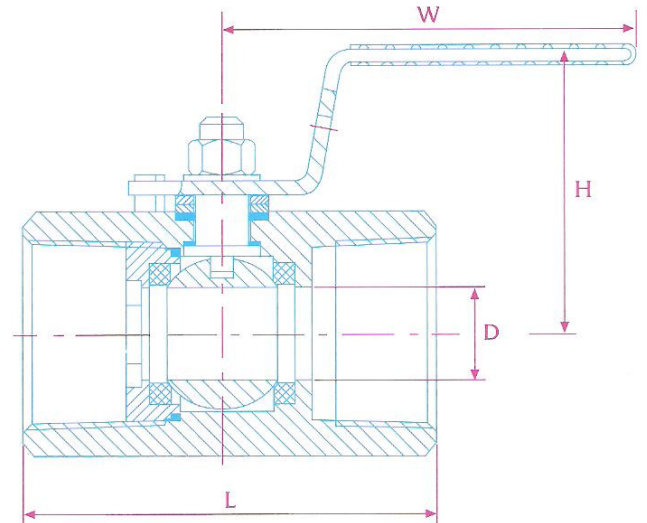

Reduce Port One-Piece Ball Valve Screwed End 1000 W.O.G.

Model: S1PC-S-A3

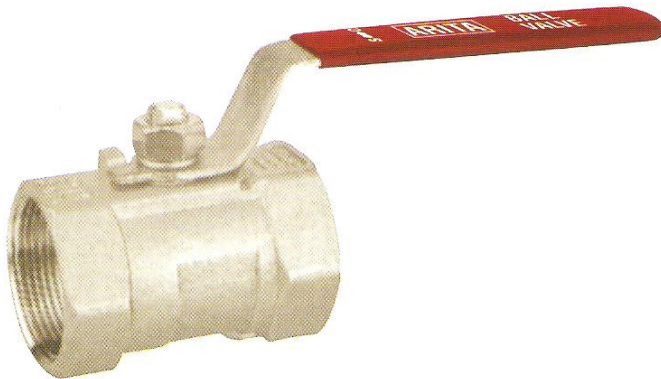

Materials

Parts	ASTM Materials		
Body	WCB	CF8	CF8M
Inscribed Part	SS304	CF8	CF8M
Ball	SS304	SS304	SS316
Stem	SS316	SS316	SS316
Seat	RPTFE	RPTFE	RPTFE
Body Seal	RPTFE	RPTFE	RPTFE
Thrust Washer	RPTFE	RPTFE	RPTFE
Stem Packing	RPTFE	RPTFE	RPTFE
Gland	SS304	SS304	SS304
Stem Washer	SS304	SS304	SS304
Stem Nut	SS304	SS304	SS304
Handle	SS304	SS304	SS304
Plastic Cover	Plastic	Plastic	Plastic

Features

- Pipe thread in accordance : NPT, BSPT, DIN259, DIN2999, ISO 228 CLASS A
- Blow-out proof stem /reduce port
- Investment casting body
- 1000psi (69 Bar) W.O.G.
- Material : S45C / ASTM A216Gr-WCB / DIN1.0619
SS304 / ASTM A351Gr-CF8 / DIN1.4308
SS316 / ASTM A351Gr-CF8M / DIN1.4408

Dimensions

mm

Size	D	L	H	W	CV FACTOR	TORQUE N.M	WEIGHT KG
1/4	5	39	34	68	4.0	0.6	0.07
3/8	7	44	36	80	4.0	0.9	0.11
1/2	10	59	47	95	4.5	1.0	0.18
3/4	13	60	50	95	9.0	2.0	0.26
1	16	72	52	114	16.0	4.0	0.39
1 1/4	20	77	57	114	24.0	5.5	0.59
1 1/2	25	84	67	156	37.0	7.0	0.82
2	32	100	73	156	68.0	9.0	1.23

PRESSURE-TEMPERATURE RATING 1/4"-2"

