



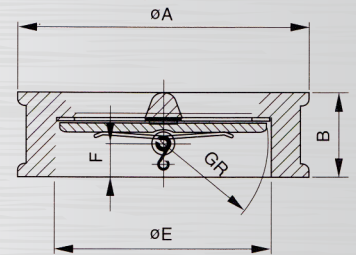

CAST IRON DOUBLE DOOR WAFER CHECK VALVE

Model : DDCV-J

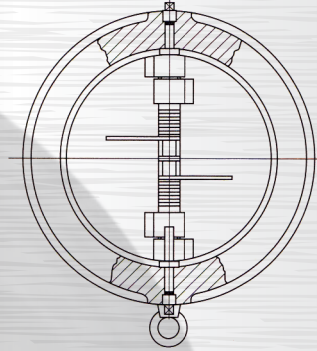

Operating Pressure and Temperature

Working Pressure	1.6 Mpa
Hydraulic Shell Test Pressure	2.4 Mpa
Hydraulic Seat Test Pressure	1.76 Mpa
Working Temperature	-10°C to 120°C (EPDM) -10°C to 80°C (NBR)
Suitable Media	Water, Oil & Gas

Note :

1. Body Flange to JIS 10K
2. Other Flange standard available upon request

Material Specification

Part	Material	JIS
Body	Cast Iron	FC 25
Disc	Ductile Iron	FCD 40
	Aluminium Bronze	ALBC 2
	Stainless Steel 304	SCS 13
	Stainless Steel 316	SCS 14
Spring	Stainless Steel 316	SUS 316
Shaft	Stainless Steel 316	SUS 316
Seat	EPDM	
	NBR	

Dimension

Size (mm)	A	B	E	F	GR
50	107	43	65	19	28.8
65	127	46	80	20	36.1
80	142	64	94	28	43.4
100	162	64	117	27	52.8
125	192	70	145	30	65.7
150	218	76	170	31	78.6
200	273	89	224	33	104.4
250	328	114	265	50	127
300	378	114	310	43	148.3
350	438	127	360	45	172.4
400	489	140	410	52	194.4
450	539	152	450	58	217.8
500	594	152	505	58	241
600	695	178	624	73	295.4

Other range available upon request
Specifications are subject to change without prior notice

Distributed By :