

FlowCon SM 50-150mm

Dynamic Self Balancing Control Valve



SPECIFICATIONS


Pressure rating:	4000 kPa / 580 psi
Temperature rating, media:	-20°C to +120°C / -4°F to +248°F
Temperature rating, ambient:	-10°C to +50°C / +14°F to +122°F
Material:	
- Diaphragm:	Hydrogenated acrylonitrile-butadiene-rubber
- Body:	Ductile iron ASTM A395 Grade 60-40-18
- O-rings:	EPDM
- Internal metal components:	Stainless steel
End connection:	Universal flange connections which can be used with both ISO and ANSI Flanges and mounting kits are not supplied by FlowCon ¹
Body tappings:	1/4" ISO
Maximum close off pressure:	600 kPa / 87 psi
Maximum operational ΔP :	400 kPaD / 58 psid
Flow rate range:	1.48-29.5 l/sec / 23.4-468 GPM

Note1: 2x16mm studs and 4x16mm bolts with nuts are supplied with SM.3.x.x.x.

DIMENSIONS AND WEIGHTS (NOMINAL) (measured in mm unless noted)

Model no.	Valve size	L	H1	H2	Weight ² (kgs.)
SM.3.X	50	224	252	95	15.0 ³
	65				
	80				
SM.4.X	80	320	292	135	31.0
	100				32.0 (SM.4.3)
SM.5.X	125	422	343	180	61.0
	150				

Note 2: Weight includes valve and actuator.
 Note 3: Including studs, bolts and nuts provided with valve.

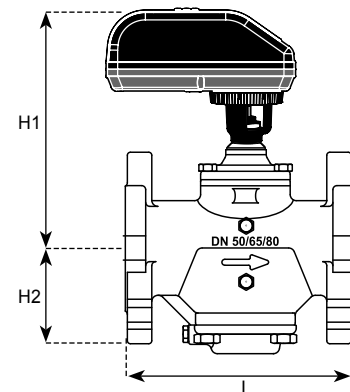

MODEL NUMBER SELECTION⁴

Insert valve body size:
3=50-80mm, 2"-3" **4**=80-100mm, 3"-4" **5**=125-150mm, 5"-6"


Insert dP control range:
0=35-400 kPaD, 5.1-58 psid (SM.3 only)
1=35-400 kPaD, 5.1-58 psid
2=60/80-400 kPaD, 8.7/11.6-58 psid
3=60-400 kPaD, 8.7-58 psid (SM.4 only)

Insert p/t plug requirements:
B=p/t plugs (standard)

Insert actuator selection:
3=display (SM.0.0.0.3) **4**=display and failsafe (SM.0.0.0.4) **5**=display and BACnet (SM.0.0.0.5) **6**=display, BACnet and failsafe (SM.0.0.0.6)

Example: SM.3.1.B.4=SM 2"-3" body for 5.1-58 psid with p/t plugs and failsafe actuator.

Note 4: Model no. and pressure range are indicated on label affixed to body.



ACTUATOR SPECIFICATIONS⁵

FlowCon SM.0.0.0.3, SM.0.0.0.4, SM.0.0.0.5 (with BACnet) and SM.0.0.0.6 (with BACnet) actuators


Supply voltage:	24V AC/DC
Power consumption:	12VA
Frequency:	50/60 HZ
Control input:	0-10V DC, 2-10V DC, 0-20mA, 4-20mA, 2-position or 3-point floating
Feedback position output:	Automatic match of control input, 0-10V DC, 2-10V DC or 4-20mA
Turn time:	190 seconds (from closed to fully open valve)
Electrical connection:	5 wires 22 AWG halogen free cable, 1 meter For BACnet versions another 3 wires 22 AWG halogen free cable, 1 meter
Direction of rotation:	Bi-directional
Humidity rating:	5 to 95% RH non condensing
Housing material:	UL94 V0-rated plastic
Housing insulation:	IP54 including up-side-down mounting
Programming:	External programming of all settings, interface of buttons and display
Calibration:	Automatic calibration at startup
Valve - actuator coupling:	Easy snap coupling
BACnet device profile:	BACnet Application Specific Controller (B-ASC) type server
BACnet protocol:	BACnet Master Slave/Token passing (MS/TP)
BACnet baud rates supported:	9600, 19200, 38400 and 76800
BACnet services (BIBBS) supported:	DS-RP-B, DS-WP-B, DM-DDB-B, DM-DOB-B and DM-DCC-B.

Note 5: FlowCon warranty is voided using other actuators than supplied or recommended by FlowCon International A/S.

FLOW RATE TABLE

Model no.	Valve size		Control range		Minimum setting			Maximum setting			Shut-off leakage
	mm	inch	kPaD	psid	l/sec	l/hr	GPM	l/sec	l/hr	GPM	
SM.3.0	50	2"	35-400	5.1-58	1.48	5310	23.4	4.16	15000	65.9	Leakage<0.2% of Kvs, Kvs=24 m³/hr
	65	2 1/2"									
	80	3"									
SM.3.1	50	2"	35-400	5.1-58	2.57	9240	40.7	7.15	25700	113	Leakage<0.2% of Kvs, Kvs=39.5 m³/hr
	65	2 1/2"									
	80	3"									
SM.3.2	50	2"	80-400	11.6-58	3.55	12800	56.3	9.89	35600	157	Leakage<0.2% of Kvs, Kvs=58.3 m³/hr
	65	2 1/2"									
	80	3"									
SM.4.1	80	3"	35-400	5.1-58	3.49	12600	55.4	9.38	33800	149	Leakage<0.2% of Kvs, Kvs=89 m³/hr
	100	4"									
SM.4.2	80	3"	60-400	8.7-58	4.73	17000	75.0	14.2	51000	225	Leakage<0.2% of Kvs, Kvs=132.3 m³/hr
	100	4"									
SM.4.3	80	3"	60-400	8.7-58	3.68	13300	58.3	20.2	72700	320	Leakage<0.2% of Kvs, Kvs=132.3 m³/hr
	100	4"									
SM.5.1	125	5"	35-400	5.1-58	6.48	23300	103	23.3	83800	369	Leakage<0.2% of Kvs, Kvs=132,3 m³/hr
	150	6"									
SM.5.2	125	5"	60-400	8.7-58	7.10	25600	113	29.5	106000	468	
	150	6"									

Accuracy: Greatest of either ±5% of controlled flow rate or ±2% of maximum flow rate.

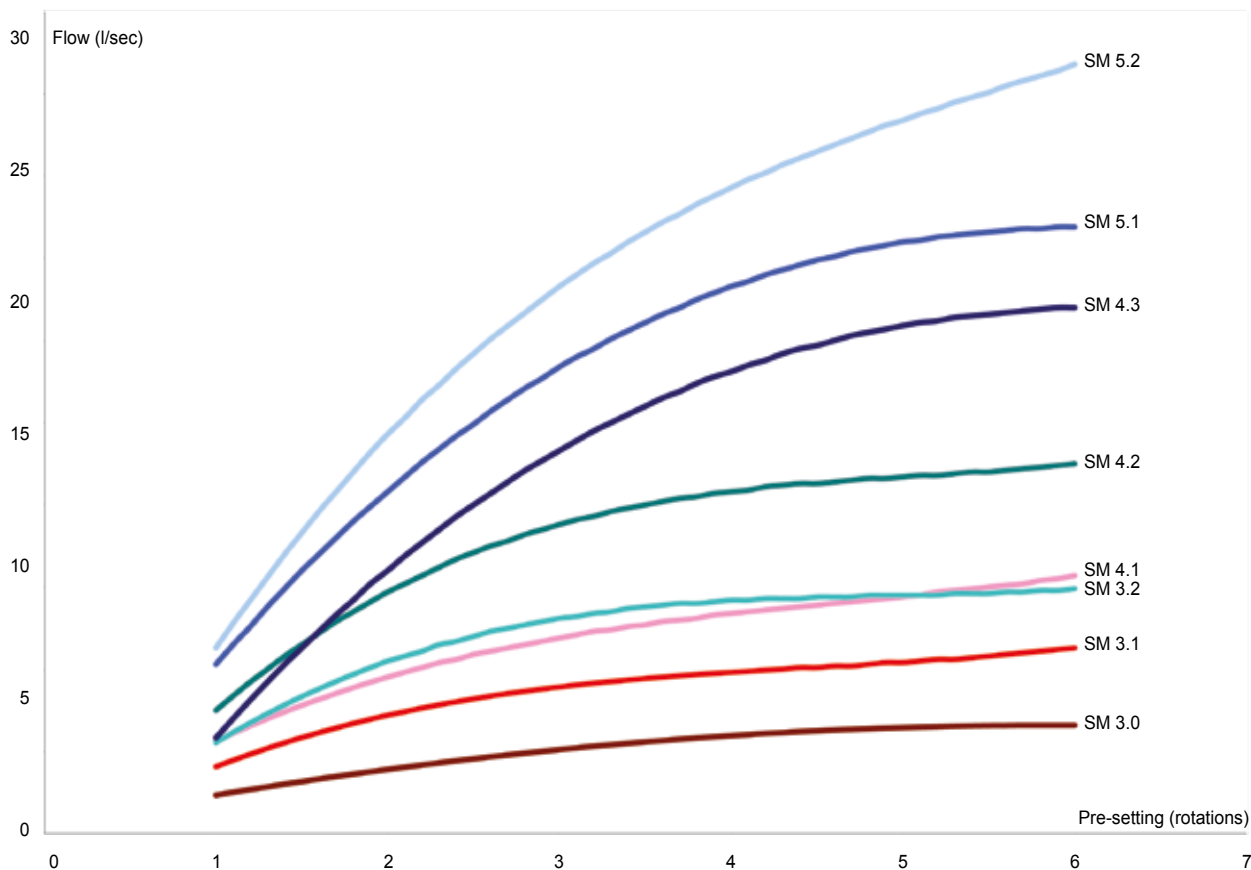

FLOW RATE SETTING - VALVE SIZE DN50-DN80

Maximum Flow Rate								
Valve size: DN50-DN80 · 2"-3"								
35-400 kPaD 5.1-58 psid			35-400 kPaD 5.1-58 psid			80-400 kPaD 11.6-58 psid		
SM.3.0			SM.3.1			SM.3.2		
l/sec	l/hr	GPM	l/sec	l/hr	GPM	l/sec	l/hr	GPM
1.48	5310	23.4	2.57	9240	40.7	3.55	12800	56.3
1.58	5700	25.1	2.81	10100	44.6	3.85	13900	61.0
1.69	6080	26.8	3.05	11000	48.3	4.13	14900	65.5
1.79	6460	28.4	3.27	11800	51.9	4.41	15900	69.9
1.90	6830	30.1	3.49	12500	55.2	4.67	16800	74.0
2.00	7190	31.6	3.69	13300	58.4	4.92	17700	78.0
2.09	7540	33.2	3.88	14000	61.5	5.16	18600	81.7
2.19	7880	34.7	4.06	14600	64.3	5.38	19400	85.3
2.28	8220	36.2	4.23	15200	67.0	5.60	20200	88.8
2.37	8540	37.6	4.39	15800	69.6	5.81	20900	92.1
2.46	8860	39.0	4.54	16300	72.0	6.01	21600	95.2
2.55	9170	40.4	4.68	16900	74.2	6.19	22300	98.2
2.63	9470	41.7	4.82	17300	76.4	6.37	22900	101
2.71	9770	43.0	4.94	17800	78.4	6.54	23600	104
2.79	10100	44.3	5.06	18200	80.2	6.71	24100	106
2.87	10300	45.5	5.17	18600	82.0	6.86	24700	109
2.95	10600	46.7	5.28	19000	83.7	7.00	25200	111
3.02	10900	47.8	5.38	19400	85.2	7.14	25700	113
3.09	11100	49.0	5.47	19700	86.6	7.28	26200	115
3.16	11400	50.0	5.55	20000	88.0	7.40	26600	117
3.22	11600	51.1	5.63	20300	89.2	7.52	27100	119
3.29	11800	52.1	5.70	20500	90.4	7.63	27500	121
3.35	12000	53.1	5.77	20800	91.5	7.74	27900	123
3.41	12300	54.0	5.84	21000	92.5	7.84	28200	124
3.46	12500	54.9	5.90	21200	93.5	7.94	28600	126
3.52	12700	55.8	5.96	21400	94.4	8.03	28900	127
3.57	12900	56.6	6.01	21600	95.2	8.12	29200	129
3.62	13000	57.4	6.06	21800	96.0	8.20	29500	130
3.67	13200	58.2	6.10	22000	96.8	8.28	29800	131
3.72	13400	58.9	6.15	22100	97.5	8.36	30100	133
3.76	13500	59.6	6.19	22300	98.2	8.44	30400	134
3.80	13700	60.2	6.23	22400	98.8	8.51	30600	135
3.84	13800	60.9	6.27	22600	99.4	8.58	30900	136
3.88	14000	61.4	6.31	22700	101	8.65	31100	137
3.91	14100	62.0	6.35	22900	101	8.72	31400	138
3.94	14200	62.5	6.39	23000	101	8.78	31600	139
3.97	14300	63.0	6.42	23100	102	8.85	31900	140
4.00	14400	63.4	6.46	23300	102	8.91	32100	141
4.03	14500	63.8	6.50	23400	103	8.98	32300	142
4.05	14600	64.2	6.54	23500	104	9.04	32600	143
4.07	14700	64.5	6.58	23700	104	9.11	32800	144
4.09	14700	64.8	6.62	23800	105	9.18	33000	145
4.11	14800	65.1	6.67	24000	106	9.25	33300	147
4.12	14800	65.3	6.72	24200	106	9.32	33500	148
4.13	14900	65.5	6.77	24400	107	9.39	33800	149
4.14	14900	65.7	6.82	24600	108	9.46	34100	150
4.15	14900	65.8	6.88	24800	109	9.54	34300	151
4.16	15000	65.9	6.94	25000	110	9.62	34600	153
4.16	15000	65.9	7.01	25200	111	9.71	34900	154
4.16	15000	65.9	7.08	25500	112	9.79	35300	155
4.16	15000	65.9	7.15	25700	113	9.89	35600	157

Maximum Flow Rate								
Valve size: DN80 and DN100 · 3"-4"								
35-400 kPaD 5.1-58 psid			60-400 kPaD 8.7-58 psid			60-400 kPaD 8.7-58 psid		
SM.4.1			SM.4.2			SM.4.3		
l/sec	l/hr	GPM	l/sec	l/hr	GPM	l/sec	l/hr	GPM
3.49	12600	55.4	4.73	17000	75.0	3.68	13300	58.3
3.88	14000	61.6	5.29	19000	83.8	4.42	15900	70.0
4.26	15300	67.5	5.82	21000	92.3	5.13	18500	81.3
4.61	16600	73.0	6.33	22800	100	5.82	21000	92.3
4.94	17800	78.4	6.82	24500	108	6.50	23400	103
5.26	18900	83.4	7.28	26200	115	7.15	25700	113
5.56	20000	88.1	7.72	27800	122	7.78	28000	123
5.84	21000	92.6	8.14	29300	129	8.40	30200	133
6.11	22000	96.9	8.54	30700	135	8.99	32400	142
6.36	22900	101	8.91	32100	141	9.57	34400	152
6.60	23800	105	9.27	33400	147	10.1	36400	160
6.82	24600	108	9.61	34600	152	10.7	38400	169
7.03	25300	111	9.93	35700	157	11.2	40200	177
7.23	26000	115	10.2	36800	162	11.7	42100	185
7.41	26700	117	10.5	37800	167	12.2	43800	193
7.58	27300	120	10.8	38800	171	12.6	45500	200
7.73	27800	123	11.0	39700	175	13.1	47100	207
7.88	28400	125	11.3	40500	178	13.5	48700	214
8.01	28800	127	11.5	41300	182	13.9	50200	221
8.14	29300	129	11.7	42000	185	14.3	51600	227
8.25	29700	131	11.9	42700	188	14.7	53000	233
8.35	30100	132	12.0	43400	191	15.1	54300	239
8.45	30400	134	12.2	43900	194	15.4	55600	245
8.53	30700	135	12.4	44500	196	15.8	56800	250
8.61	31000	137	12.5	45000	198	16.1	58000	255
8.68	31300	138	12.6	45500	200	16.4	59100	260
8.75	31500	139	12.7	45900	202	16.7	60200	265
8.80	31700	140	12.9	46300	204	17.0	61200	269
8.85	31900	140	13.0	46700	205	17.3	62100	274
8.90	32000	141	13.1	47000	207	17.5	63000	278
8.94	32200	142	13.1	47300	208	17.8	63900	281
8.97	32300	142	13.2	47600	209	18.0	64700	285
9.00	32400	143	13.3	47800	210	18.2	65500	288
9.03	32500	143	13.4	48100	212	18.4	66200	292
9.05	32600	143	13.4	48300	213	18.6	66900	295
9.07	32600	144	13.5	48500	214	18.8	67600	297
9.09	32700	144	13.5	48700	214	18.9	68200	300
9.10	32800	144	13.6	48800	215	19.1	68700	303
9.12	32800	145	13.6	49000	216	19.2	69200	305
9.13	32900	145	13.7	49200	217	19.4	69700	307
9.15	32900	145	13.7	49300	217	19.5	70200	309
9.16	33000	145	13.7	49500	218	19.6	70600	311
9.18	33000	145	13.8	49600	218	19.7	70900	312
9.19	33100	146	13.8	49800	219	19.8	71300	314
9.21	33200	146	13.9	49900	220	19.9	71600	315
9.23	33200	146	13.9	50100	220	20.0	71900	316
9.25	33300	147	14.0	50200	221	20.0	72100	317
9.28	33400	147	14.0	50400	222	20.1	72300	318
9.31	33500	148	14.1	50600	223	20.1	72500	319
9.34	33600	148	14.1	50800	224	20.2	72600	320
9.38	33800	149	14.2	51000	225	20.2	72700	320

Maximum Flow Rate					
Valve size: DN125 and DN150 · 5"-6"					
35-400 kPaD 5.1-58 psid			60-400 kPaD 8.7-58 psid		
SM.5.1			SM.5.2		
l/sec	l/hr	GPM	l/sec	l/hr	GPM
6.48	23300	103	7.10	25600	113
7.24	26100	115	8.06	29000	128
7.98	28700	126	8.98	32300	142
8.70	31300	138	9.87	35500	157
9.39	33800	149	10.7	38600	170
10.1	36200	160	11.6	41600	183
10.7	38600	170	12.4	44500	196
11.4	40900	180	13.1	47300	208
12.0	43100	190	13.9	50000	220
12.6	45200	199	14.6	52600	232
13.1	47300	208	15.3	55100	243
13.7	49300	217	16.0	57500	253
14.2	51200	226	16.6	59800	264
14.8	53100	234	17.2	62100	273
15.3	54900	242	17.8	64200	283
15.7	56600	249	18.4	66300	292
16.2	58300	257	19.0	68300	301
16.6	59900	264	19.5	70200	309
17.1	61500	271	20.0	72100	317
17.5	63000	277	20.5	73800	325
17.9	64400	284	21.0	75500	333
18.3	65800	290	21.4	77200	340
18.6	67100	295	21.9	78700	347
19.0	68300	301	22.3	80200	353
19.3	69500	306	22.7	81700	360
19.6	70700	311	23.1	83100	366
19.9	71700	316	23.4	84400	372
20.2	72800	320	23.8	85700	377
20.5	73800	325	24.1	86900	383
20.7	74700	329	24.5	88100	388
21.0	75600	333	24.8	89200	393
21.2	76400	336	25.1	90300	398
21.4	77200	340	25.4	91400	402
21.6	77900	343	25.7	92400	407
21.8	78600	346	25.9	93400	411
22.0	79200	349	26.2	94300	415
22.2	79800	351	26.5	95200	419
22.3	80300	354	26.7	96100	423
22.5	80800	356	26.9	97000	427
22.6	81300	358	27.2	97800	431
22.7	81700	360	27.4	98600	434
22.8	82100	361	27.6	99400	438
22.9	82400	363	27.8	100000	441
23.0	82700	364	28.1	101000	445
23.0	83000	365	28.3	102000	448
23.1	83200	366	28.5	102000	451
23.2	83400	367	28.7	103000	455
23.2	83500	368	28.9	104000	458
23.2	83600	368	29.1	105000	461
23.3	83700	369	29.3	105000	464
23.3	83800	369	29.5	106000	464

FLANGE MATCH SM HOUSING

Model no.	Flange size (inch)	ASME B16.5 weld neck flanges		ASME B16.5 slip on flanges		Flange size (mm)	EN1092-1 ⁶				EN1092-1 ⁷			
		Class 150	Class 300	Class 150	Class 300		PN10	PN16	PN25	PN40	PN10	PN16	PN25	PN40
SM.3.x	2	-	✓	-	✓	50	✓	✓	✓	✓	✓	✓	✓	✓
	2 1/2	✓	✓	✓	✓	65	✓	✓	✓	✓	✓	✓	✓	✓
	3	✓	✓	-	-	80	✓	✓	✓	✓	-	-	-	-
SM.4.x	3	✓	✓	✓	✓	80	✓	✓	✓	✓	✓	✓	✓	✓
	4	✓	✓	-	-	100	✓	✓	✓	✓	-	-	-	-
SM.5.x	5	✓	✓	✓	✓	125	✓	✓	✓	✓	✓	✓	✓	✓
	6	✓	-	-	-	150	✓	✓	✓	✓	-	-	-	-

Note 6: Type 02 and 35/36/37 (loose plate flange with welding neck / pressed collar with long neck / pressed collar) or Type 04 and 34 (loose plate flange with weld-neck collar) or Type 11 with flange facing A/B (weld-neck flange with flat face or raised face).

Note 7: Type 12 with flange facing A/B (hubbed slip-on flange with flat face or raised face).

GENERAL DESCRIPTION

The SM Series are self balancing dynamic flow control valves that are pressure independent, two-way, modulating to accept digital or analog input signals. The valves accept 2-10V DC, 4-20mA, digital 2-position or digital 3-point floating input signals. Each valve has an adjustable maximum flow rate setting to enable flow limitation and balancing to the coils or zones that the valves are controlling.

All SM actuators are microprocessor based with a self-calibrating feature.

The SM valve is of the wafer style for fitting between flanges. They are available in three different valve bodies for flange connections.

GENERAL SPECIFICATIONS

1. PRESSURE INDEPENDENT DYNAMIC CONTROL VALVE FLOWCON SM

- 1.1. Contractor shall install dynamic control valves where indicated in drawings.
- 1.2. Valve shall be an electronic, dynamic, modulating, 2-way pressure independent control device.
- 1.3. Pressure independent dynamic control valve shall accurately control flow, independent of system pressure fluctuation.
- 1.4. Maximum flow setting shall be adjustable to 51 different settings within the range of the valve size.
- 1.5. Valve and actuator coupling shall have snap couplings for fast mounting and demounting.

2. VALVE ACTUATOR

- 2.1. Valve and actuator coupling shall have snap couplings for fast mounting and demounting.
- 2.2. Actuator housing shall be rated to IP54 including up-side-down mounting.
- 2.3. Actuator shall be driven by a 24V AC/DC motor and shall accept 0-10V DC, 2-10V DC, 0-20mA, 4-20mA, 2-position or 3-point floating electric input signal.
- 2.4. Actuator shall be capable of providing same as input, 4-20mA, 0-10V DC or 2-10V DC feedback signal to the control system.
- 2.5. Automatic calibration of valve position shall be standard.
- 2.6. Actuator shall include display and buttons for external programming of all settings.
- 2.7. External display of current valve flow, maximum valve flow, input signal, feedback signal and operational direction shall be standard.
- 2.8. Optional fail safe system to power valve to either open (max. setting) or closed position from any position in case of power failure shall be available.
- 2.9. Optional BACnet connection for remote setting and control of actuator shall be available.

continues...

GENERAL SPECIFICATIONS (continued)


3. VALVE HOUSING

- 3.1. Valve housing shall consist of ductile iron ASTM A395 Grade 60-40-18 rated at no less than 4000 kPa static pressure and +120°C.
- 3.2. Valve housing shall be permanently marked to show direction of flow.
- 3.3. Valve housing shall be for installation between flanges.
- 3.4. Dual pressure/temperature test plugs for verifying accuracy of flow performance shall be provided for all valve sizes.
- 3.5. Identification tags shall be available for all valves; tags shall be indelibly marked with part number, production date and pressure differential range. Tags shall be of aluminum and in size 50mm x 25mm.

4. FLOW REGULATOR / AUTOMATIC BALANCING UNIT

- 4.1. Flow regulation unit shall be manufactured of stainless steel and hydrogenated acrylonitrile-butadiene-rubber and shall be capable of controlling flow within $\pm 5\%$ rated flow rate or $\pm 2\%$ of maximum flow rate.
- 4.2. Flow regulation unit shall be accessible for change-out or maintenance.

APPLICATION AND SCHEMATIC EXAMPLE

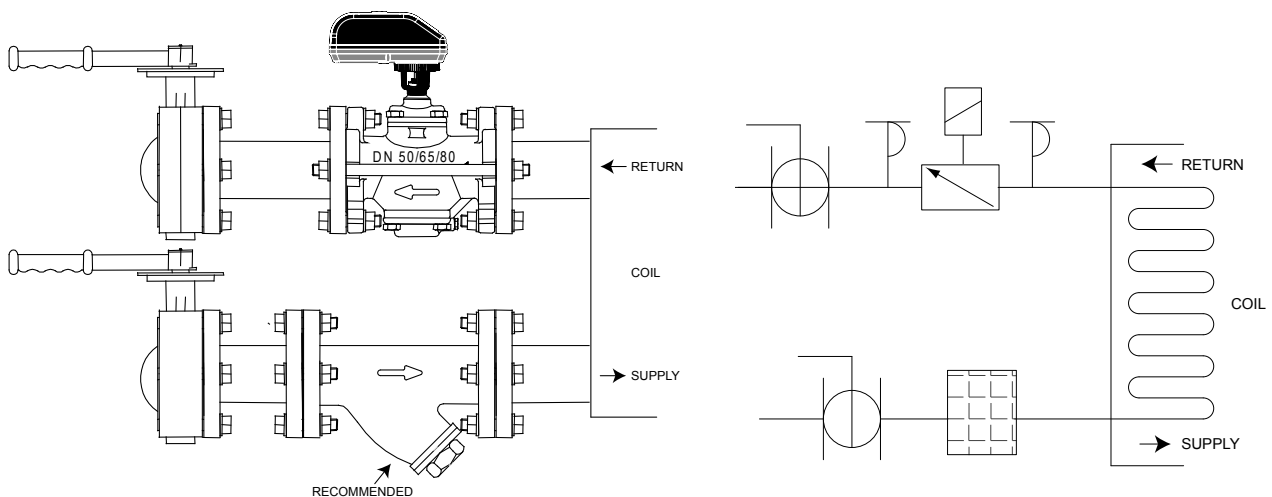

UPDATES

For latest updates please see www.flowcon.com

FlowCon International can accept no responsibility for possible errors in any printed material.
All rights reserved.