




Full Port Two-Piece Body Ball Valve Screwed End 1000 W.O.G.

Model: S2PC-S-A4

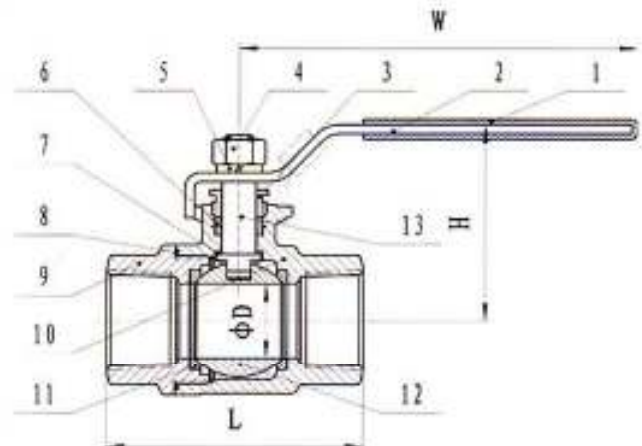

MATERIAL LIST

ITEM	DESIGNATION	MATERIAL
1	PLASTIC COVER	PLASTIC
2	HANDLE	304
3	GLAND NUT	304
4	STEM NUT	304
5	THRUST WASHER	304
6	STEM PACKING	PTFE
7	STEM SEAL	PTFE
8	BODY SEAL	PTFE
9	CAP	CF8/CF8M
10	BODY	CF8/CF8M
11	SEAT	RPTFE
12	BALL	CF8M
13	STEM	304/316

Features

- Pipe thread in accordance : NPT, BSPT, DIN259, DIN2999, ISO 228 CLASS A
- Blow-out Proof Stem / Full Port
- Investment Casting Body
- 1000 psi (69 Bar) W.O.G.
- Material : SS304 / ASTM A351Gr-CF8 / DIN1.4308
SS316 / ASTM A351Gr-CF8M / DIN1.4408

DIMENSION TABLE

SIZE ITEM	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
D	12.5	12.5	15	20	25	32	38	50	65	76	94
L	47	49	58	65	77	90	98	121	145	166	226
H	48	48	52	61	65	79	83	97	135	144	166
W	103	103	103	123	123	153	153	185	243	243	295
wgt/kg	0.18	0.18	0.26	0.39	0.59	0.99	1.32	2.46	4.83	7.45	17.5

